



INSTALLATION INSTRUCTIONS OIL FILTER RELOCATION KIT PART # 15716

Please read these instructions completely before beginning installation

KIT CONTENTS

QTY.	DESCRIPTION	QTY.	DESCRIPTION
1	Spin-On Adapter	1	3/4-16 Filter Nipple
1	Adapter Plate	10ft.	1/2" Hose
1	Ports Up Filter Mount	4	1/2" NPT x 1/2" Hose Barb
1	O-ring (Spin-On Adapter)	4	Hose Clamps
1	O-ring (Adapter Plate)	3	#14 Sheet Metal Screws

TOOLS NEEDED

7/8" Open End Wrench	3/16" Drill Bit
Standard Screw Driver	Drill
	Teflon Tape

PART #	THREAD SIZE
15716	13/16"-16

PRE-INSTALLATION

Note: This kit includes a 3 1/2" O-ring Adapter Plate, this Adapter Plate is used Primarily on GM vehicles Manufactured between 1963-2007.

If your vehicle does not require the Adapter Plate, please disregard.

Important: The new Filter Mount is designed to accept a 3/4-16 oil filter (Typical Ford filter) Use Derale Part # 13092 or reference chart below for manufacturers part numbers.

1. Remove the factory oil filter and clean the oil filter landing surface on the engine block.
2. Take the four 1/2" NPT x 1/2" Hose Barbs supplied. Using a Teflon Tape or suitable sealant, install two 1/2" NPT x 1/2" Hose Barbs onto the Spin-On Adapter. Install the remaining two 1/2" NPT x 1/2" Hose Barbs onto the Ports-Up Filter Mount.
3. To determine if you need the supplied Adapter Plate, hold it up to the oil filter landing on the block. If the O-ring seats correctly on the landing you will use both the Adapter Plate and Spin-on Adapter. If it is too large, then disregard the Adapter Plate and O-ring and only use the Spin-on Adapter.

INSTALLATION


1. Apply a light coat of oil onto the O-ring(s).
2. Take the O-ring and install into the groove on the Spin-On Adapter and Adapter Plate (if used).
3. Install onto the engine. (See Diagram #1)
4. Hand Tighten with the same force used in tightening a factory oil filter.
5. Choose a convenient location for the Ports-Up Filter Mount. Make sure there is enough space for future servicing of the oil filter. Suggested Locations: Firewall, Radiator Support, Fender well
6. Take the 3/4-16 Filter Nipple supplied, making sure the shorter end of threads is installed onto the Ports-Up Filter Mount.
7. Using the filter mount as a template, mark and drill three 3/16" holes.
8. Using the #14 Sheet Metal Screws provided, install the Ports-Up Filter Mount onto the vehicle.
9. Using the Hose Clamps provided, attach both ends of the 1/2" Hose provided to the hose barbs on the installed Spin-On Adapter forming a loop.
10. Carefully route hose over to the Ports-Up Filter Mount.

Note: Keep hoses away from sharp edges, moving parts and exhaust. Do not bend hose sharper than a 5" radius.
11. Cut the hose to the proper length.
12. Using the Hose Clamps provided, attach the hose coming from the OUT on the Spin-On Adapter to the IN on the Ports-Up Filter Mount.
13. Using the Hose Clamps provided, attach the hose coming from the IN on the Spin-On Adapter to the OUT on the Ports-Up Filter Mount.
14. Apply a light coat of oil onto the o-ring of your new oil filter and install on the filter mount.

VEHICLE TESTING

1. Start the engine and quickly check all connections for leaks.
2. Turn-off the engine and check the oil.
3. Add oil as needed.

Diagram #1

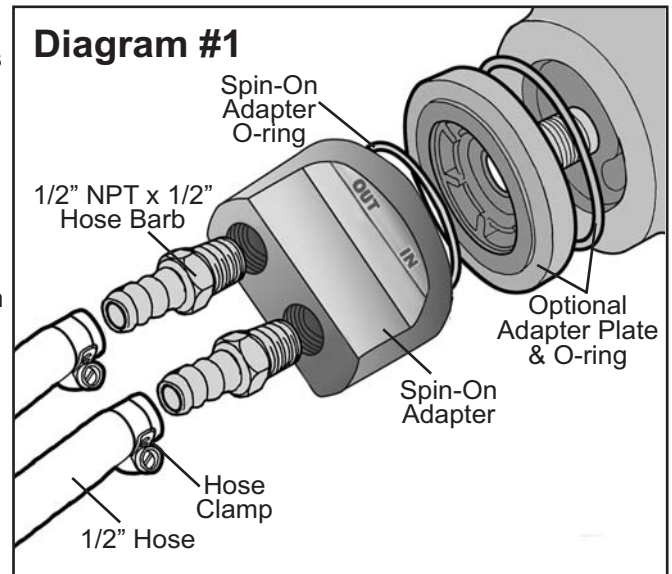

OIL FILTER CHART

BRAND	PART #
AC	PF2
Fram	PH8A
Motorcraft	FL1A
Purolator	PER1A

Warning: Installation of accessories should only be undertaken by those with mechanical knowledge and are familiar with working on vehicles. Always use eye protection (goggles, safety glasses or shield). Park the vehicle in a well lit area, on level ground and apply the parking brake. Only work on a cold vehicle that has been sitting overnight, failure to do so will result in severe burns and injury. Before starting the vehicle, make sure no tools or any other items are left under hood that could interfere with or be drawn into moving parts of the engine. Failure to follow instructions can lead to severe damage and personal injury.